Shaoxing Naite Drive Technology Co.,Ltd
NO.68,Sanjiang Street,Shengzhou City,Zhejiang Province,China


www.natekj.com
sales@natekj.com
+86-575-83007022
+86 18888790086

Official website
ZHEJIANG MADE
Alibaba

# NATE

SMART DESK
SMART LIFE

## HEIGHT ADJUSTABLE SMART FURNITURE SOLUTIONS

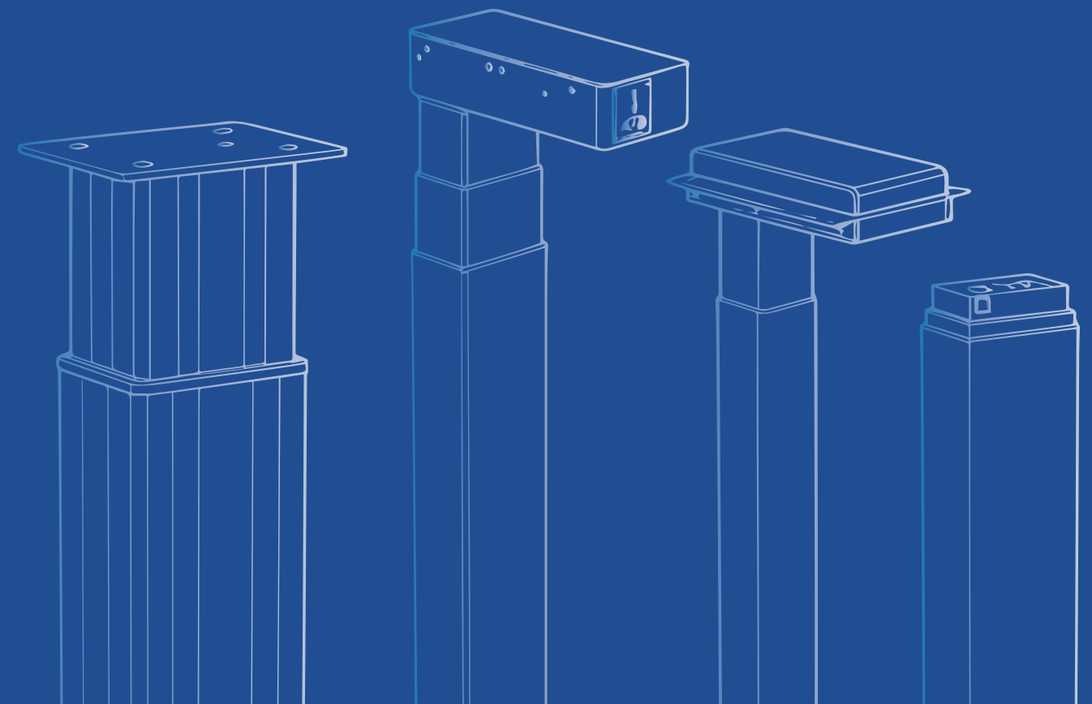

2026

Shaoxing Naite Drive Technology CO.,Ltd

CONTENTS

# CONTENTS


1 ABOUT US

About NATE P01
Sustainable Development P03
Key Capabilities P05
Global Footprint P07
Qualifications & Certifications P09

2 PRODUCT CLASSIFICATION

Component Based Customized Solutions P11
Innovative Intelligence Series P13
Classic Series P25
Economical Series P45
Complete Desk Series P57

3 MODULE

Lift Columns P69
Control Box P75
Handsets P77
Feet P81
Accessories P83
Table Top P87

# ABOUT NATE




Shaoxing Naite Drive Technology Co., Ltd., founded in July 2013, is an innovative enterprise specializing in the production of ergonomic height-adjustable desk;we transmit the aesthetics of life and advocate healthy office methods, and always take "providing more people with a healthy office environment " as the enterprise mission.

SCAN TO
WATCH THE VIDEO




2025
START CONSTRUCTION

2026
CONSTRUCTION COMPLETION

2027
PUT INTO PRODUCTION


In 2027, our 55,000㎡ intelligent manufacturing base will become operational, doubling our design capacity and reserving sufficient space for the company's future high-quality development. Centered around the smart factory, we will comprehensively establish a new intelligent manufacturing ecosystem, propelling the enterprise into a new stage of high-quality development.






# SUSTAINABLE DEVELOPMENT

NATE uses intelligent production (digital injection molding, robot welding) for precision, efficiency and stability, while monitoring energy use to cut resource waste and carbon emissions.

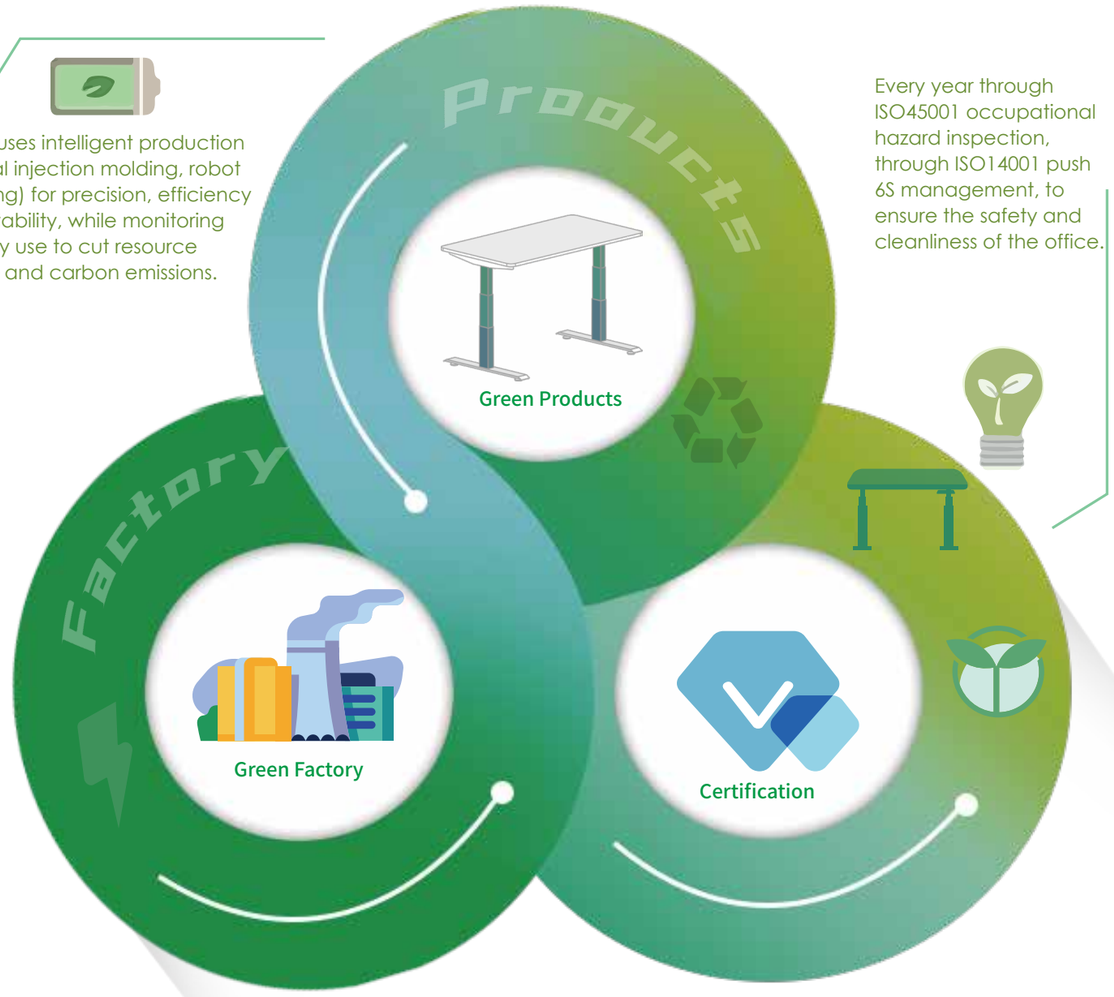


Every year through ISO45001 occupational hazard inspection, through ISO14001 push 6S management, to ensure the safety and cleanliness of the office.

## GREEN FACTORY

The annual clean production audit report is obtained, and the energy low carbon permanent magnet air compressor is adopted, which can save up to 33,000 KWH of electric energy each year.



## Durability

**20000 +**

Column lifting service life test

## Q-Install

Reduce recycling, transportation and installation costs; portable and efficient.

## Standby Power

**0.1W**

Ultra-Low standby power consumption

10,000 tables for 10 years

→ Saved **3.6** tons $CO_2e$

## Brushless Motor

**20%**

We adopts brushless motor, the efficiency is improved by 20%, environmental protection and energy saving, and the life is longer.

## Recyclable Raw Materials

- Honeycomb paperboard
- Eggshell cardboard
- ABS
- PC
- POM
- Other Plastic

ISO 45001
ISO 14001
ISO 50001
ISO 9001
ISO 14064
Standardize processes, enhance efficiency, and ensure quality

Strictly control the use of hazardous substances

Control and management of chemical substances

Reduce E-waste and improve resource recycling

# KEY CAPABILITIES



## Professional R&D Capability

End-to-end support from concept to finished product, ensuring seamless execution of your projects from ideation to realization.



## Core Customization Capability

Integrates leading innovation, strict quality control, and highly competitive pricing.



## Flexible Manufacturing Capability

Rapid-response vertical integration, delivering efficient and agile production to precisely meet diverse market demands.



## Worry-Free After-Sales Support

Backed by a 5-year warranty commitment, our dedicated after-sales team ensures rapid response and comprehensive lifecycle support.




## Stringent Quality Control Capability

Equipped with 30+ inspection equipment, providing full-chain quality assurance to ensure every product meets international standards.



## Comprehensive Marketing Support

We offer one-stop marketing material production services, including product photography, professional retouching, and installation videos.

# GLOBAL FOOTPRINT




ASIA

EUROPE

NORTH AMERICA

SOUTH AMERICA

OCEANIA

**35000+ m²**
Factory Area

**200+**
Factory Employee


**450K+ PCS/YR**
Production Capacity

**30+**
R&d Engineer

**100+**
Patents


**80+**
Partner Countries

# QUALIFICATIONS & CERTIFICATIONS

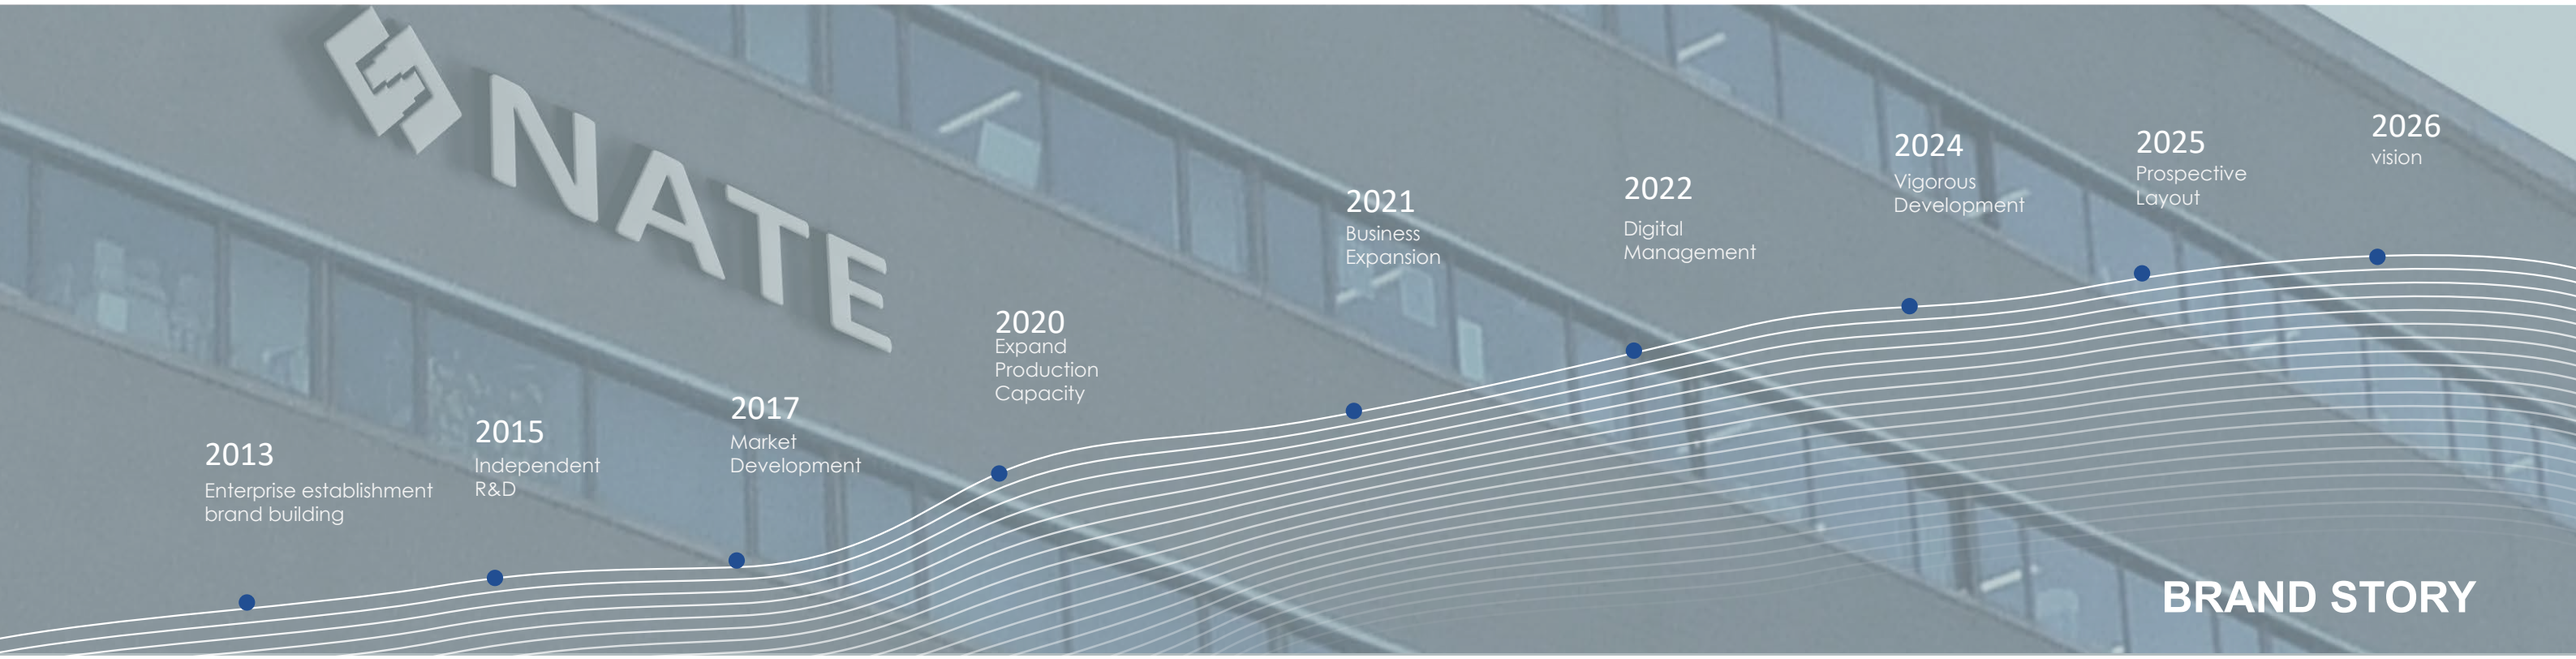


AMER cUL Ca Prop65 UL FC BIFMA AU SAA APPROVALS
EU CE EMC UKCA GS geprufte Sicherheit ASIA CB PSE KC


# COMPONENT BASED CUSTOMIZED SOLUTIONS

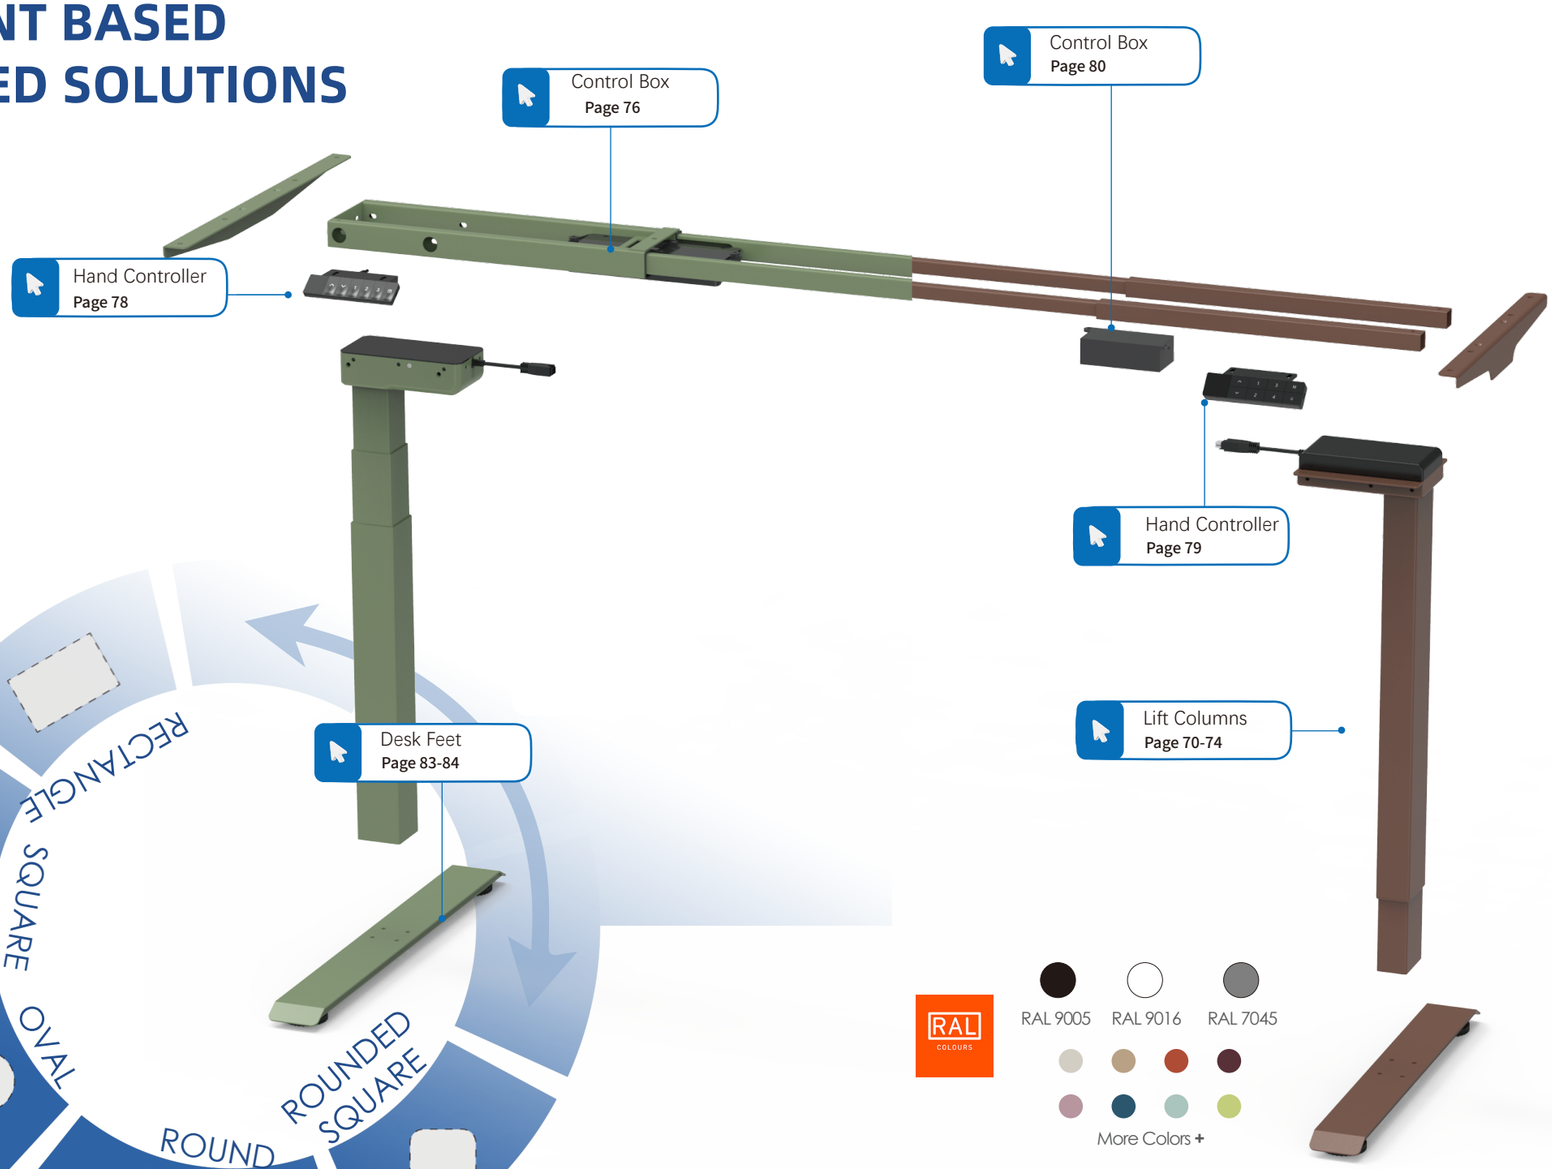






In addition to the classic black, white, and gray, you can customize desk frames, legs, and feet in almost any specific color.

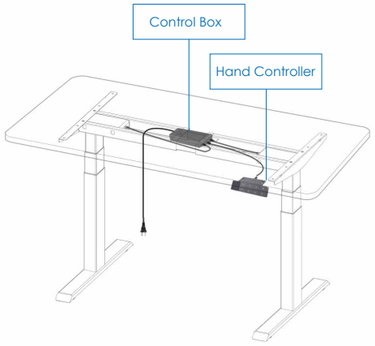


## Classic Model

**Split Design Of Hand Controller + Independent Controller**

Load Capacity: **120kg** Speed: **40mm/s**

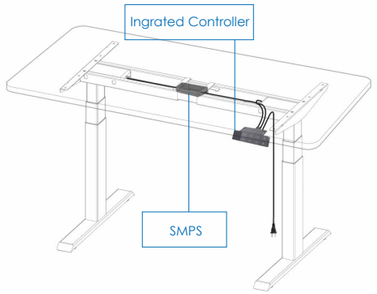


## Economical Model


**Integrated Hand Controller Design With Compact Structure**

Load Capacity: **100kg** Speed: **30mm/s**

# INNOVATIVE INTELLIGENCE

## SLIM NO BOX DESIGN

This lifting column feature a sleek and compact design, opening up new possibilities for height-adjustable desk solutions. The motor is vertically installed inside the column, eliminating the need for a 90° motor box and streamlining the overall profile—thus enabling endless design flexibility.

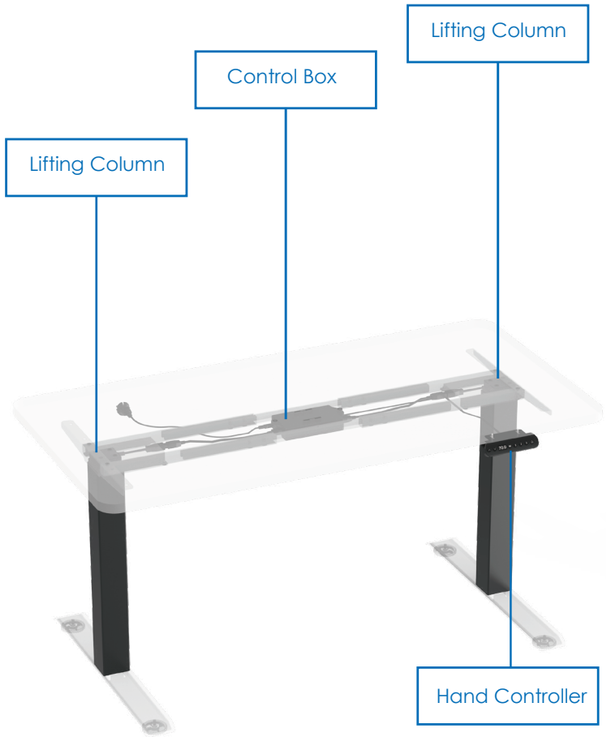








**NT33-RK-2BHF3**

| Height Range | Speed | Stroke |
|---|---|---|
| 656-1286mm | 40mm/s | 630mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 960-1500mm | 120kg | 100V-240V |



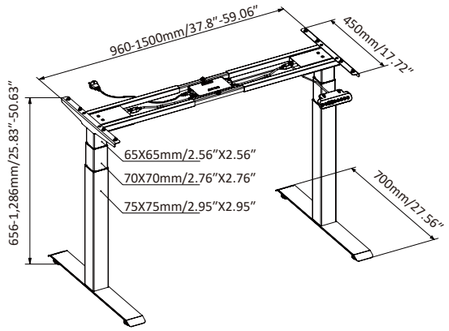

# INNOVATIVE INTELLIGENCE


## HIDDEN WIRING DESIGN

This lifting column features a built-in power cable and retains the height adjustment function. Simply connect the power supply at the bottom of the column to power the entire height-adjustable desk.








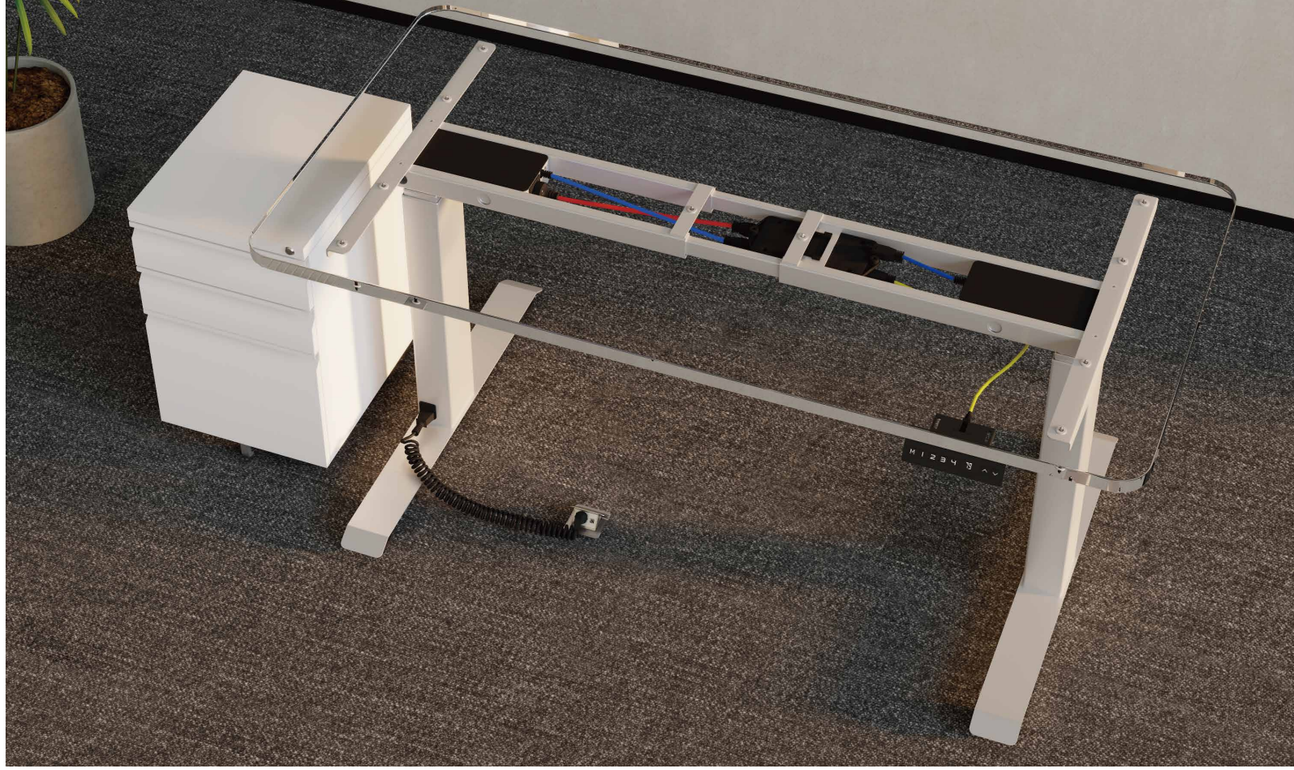

**NT33-TD-2IF3**

| Height Range | Speed | Stroke |
|---|---|---|
| 600-1250mm | 40mm/s | 650mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 1010-1750mm | 120kg | 100V-240V |



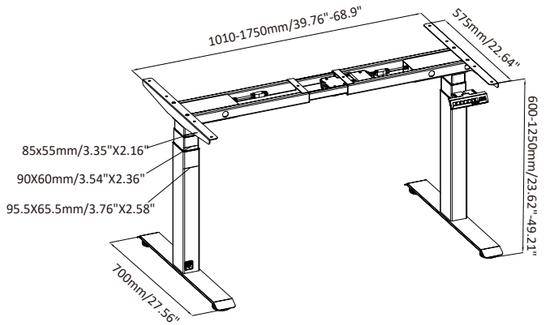

# INNOVATIVE INTELLIGENCE

## HIGH STRENGTH LOAD BEARING

**NT33-4NBF2**

**Height Range**
700-1200mm


**Speed**
18mm/s

**Stroke**
500mm

**Width Range**
1250mm

**Load Capacity**
300kg



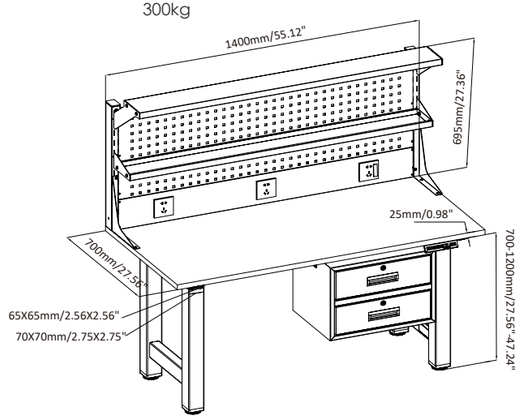


**NT33-2NF2**

**Height Range**
740-1195mm


**Speed**
8mm/s

**Stroke**
455mm

**Width Range**
1015-1750mm

**Load Capacity**
300kg



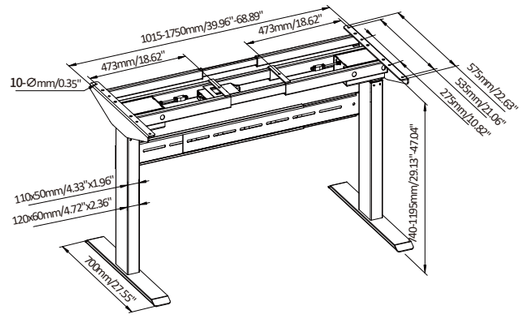

# INNOVATIVE INTELLIGENCE


## DUAL BRUSHLESS MOTORS

Adopting a brushless motor design, it features long service life and high reliability, delivers high efficiency and low energy consumption, and ensures smooth and stable operation.






- Higher output power





- Higher load capacity perfect for heavy equipment and multi-monitor setups

**NT33-2HF3A**

| Height Range | Speed | Stroke |
|---|---|---|
| 600-1200mm | 40mm/s | 600mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 1010-1750mm | 180kg | 100V-240V |



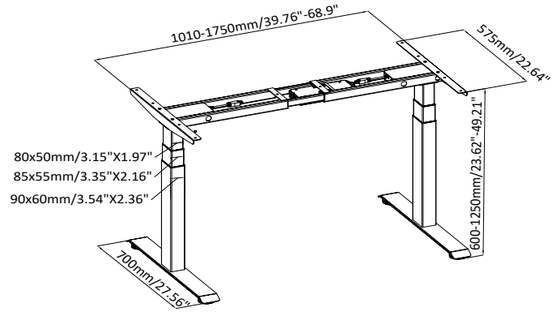

# INNOVATIVE INTELLIGENCE


## SINGLE BRUSHLESS MOTOR

Adopting a brushless motor design, it features long service life and high reliability, delivers high efficiency and low energy consumption, and ensures smooth and stable operation.






• Higher output power





• Higher load capacity



**NT33-2SACRHF2(C)**

| Height Range | Speed | Stroke |
|---|---|---|
| 700-1140mm | 30mm/s | 440mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 1010-1600mm | 100kg | 100V-240V |




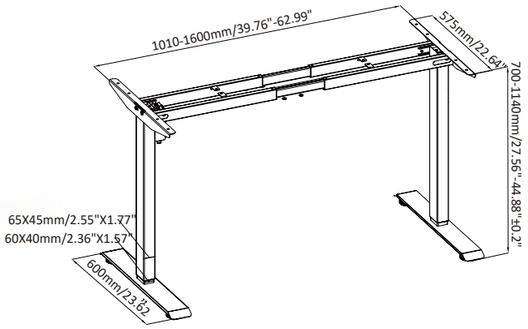


**NT33-2SBAF2**

| Height Range | Speed | Stroke |
|---|---|---|
| 715-1155mm | 20mm/s | 440mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 1000-1600mm | 70kg | 100V-240V |



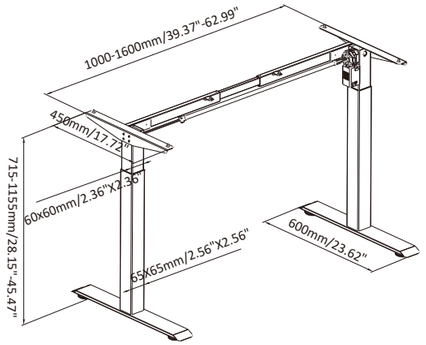

# INNOVATIVE INTELLIGENCE

## QUICK ASSEMBLY DESIGN

Without heavy installation process, NATE provides an efficient and stable lifting product, which saves 70% installation time on the basis of the original frame system, and greatly reduces the cost of manual installation of desk.

### Q-ASSEMBLY 1 No Screws Needed, Three-step quick installation




### Q-ASSEMBLY 2 Pre-tightened screws, 50% faster







**NT33-2AF3-KZE1**

| Height Range | Speed | Stroke |
|---|---|---|
| 600-1250mm | 40mm/s | 650mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 1010-1750mm | 120kg | 100V-240V |



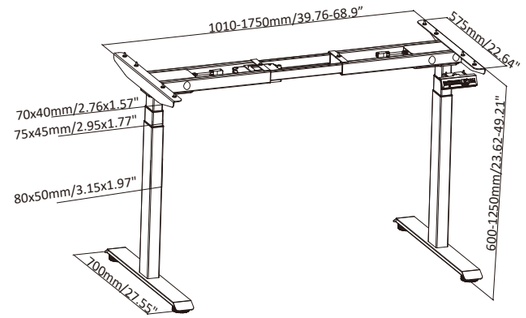

# 1-leg

Single Motor/2-stage

Anti-collision ☑

Frame Color

**Height Range(E1)**

575-1225mm

**Height Range(E2)**

675-1325mm

**Height Range(E3)**

600-1250mm

**Speed**

40mm/s

**Load Capacity**


80kg

**Voltage**

100V-240V


**NT33-E1**







**NT33-E2**



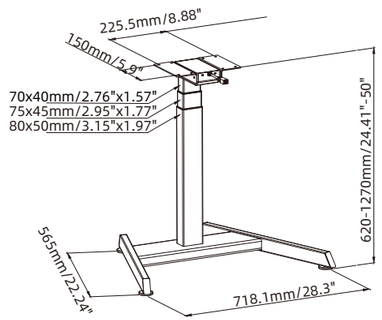


**NT33-E3**







# 2-legs

Dual Motors/2-stage

Anti-collision ☑

Frame Color




| Shape |  |  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|---|---|
| Size(mm) | 80x50 | 70x70 | 91x58 | φ70 | 85x55 | 90x60 | 75x75 | 95.5x65.5 |
| Standard Column | NT33-2AF2 | NT33-2BF2 | NT33-2CF2 | NT33-2DF2 | NT33-2FF2 | NT33-2HF2 | NT33-2BHF2 | NT33-2IF2 |
| Reversed Column | NT33-2ARF2 | NT33-2BRF2 | NT33-2CRF2 | NT33-2DRF2 | NT33-2FRF2 | NT33-2HRF2 | / | / |
| Height Range(mm) | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 |
| Width Range(mm) | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 |
| Speed(mm/s) | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |
| Load Capacity(kg) | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 |
| Electric Control | Advanced control system | | | | | | | |

**NT33-2CF2**

**Height Range**

700-1200mm

**Speed**

30mm/s

**Stroke**

500mm

**Width Range**

1010-1750mm


**Load Capacity**

120kg

**Voltage**

100V-240V



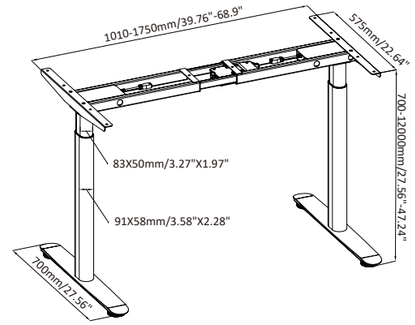






# 2-legs

## Dual Motors/3-stage

Anti-collision ☑




| Shape |  |  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|---|---|
| Size(mm) | 80x50 | 70x70 | 91x58 | φ70 | 85x55 | 90x60 | 75x75 | 95.5x65.5 |
| Standard Column | **NT33-2AF3** | **NT33-2BF3** | **NT33-2CF3** | **NT33-2DF3** | **NT33-2FF3** | **NT33-2HF3A** | **NT33-2BHF3** | **NT33-2IF3** |
| Reversed Column | **NT33-2ARF3** | **NT33-2BRF3** | **NT33-2CRF3** | **NT33-2DRF3** | **NT33-2FRF3** | **NT33-2HRF3A** | / | / |
| Height Range(mm) | 600-1250 | 600-1250 | 640-1290 | 640-1290 | 600-1250 | 600-1250 | 600-1250 | 600-1250 |
| Width Range(mm) | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 |
| Speed(mm/s) | 40 | 40/80 | 40 | 40 | 40/80 | 40/80 | 40 | 40 |
| Load Capacity(kg) | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 |
| Electric Control | **Advanced control system** | | | | | | | |

**NT33-2IF3**

**Height Range**
600-1250mm

**Speed**
40mm/s


**Stroke**
650mm

**Width Range**
1010-1750mm

**Load Capacity**
120kg

**Voltage**
100V-240V



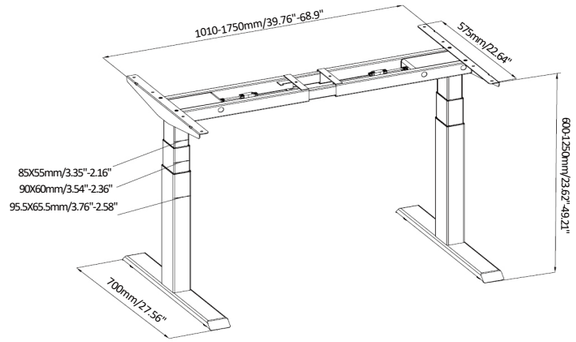


# 3-legs

## Three Motors/2-stage

Anti-collision ☑

Frame Color




| Shape | | | | | | |
|---|---|---|---|---|---|---|
| Size(mm) | 80x50 | 70x70 | 91x58 | φ70 | 85x55 | 90x60 |
| Standard Column | NT33-3AF2 | NT33-3BF2 | NT33-3CF2 | NT33-3DF2 | NT33-3FF2 | NT33-3HF2 |
| Reversed Column | NT33-3ARF2 | NT33-3BRF2 | NT33-3CRF2 | NT33-3DRF2 | NT33-3FRF2 | NT33-3HRF2 |
| Height Range(mm) | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 |
| Width Range(mm) | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 |
| Speed(mm/s) | 30 | 30 | 30 | 30 | 30 | 30 |
| Load Capacity(kg) | 150 | 150 | 150 | 150 | 150 | 150 |
| Electric Control | Advanced control system | | | | | |

**NT33-3AF2**

**Height Range**
700-1200mm

**Speed**
30mm/s


**Stroke**
500mm

**Width Range**
1010-1750mm

**Load Capacity**
150kg

**Voltage**
100V-240V



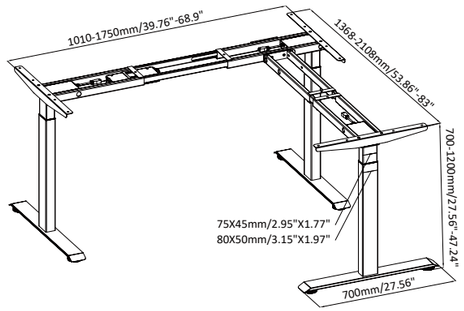



# 3-legs

## Three Motors/3-stage

Anti-collision ☑

Frame Color




| Shape | | | | | | |
|---|---|---|---|---|---|---|
| Size(mm) | 80x50 | 70x70 | 91x58 | φ70 | 85x55 | 90x60 |
| Standard Column | NT33-3AF3-90-120-180 | NT33-3BF3-90-120-180 | NT33-3CF3-90-120-180 | NT33-3DF3--90-120-180 | NT33-3FF3-90-120-180 | NT33-3HF3A-90-120-180 |
| Reversed Column | NT33-3ARF3-90-120-180 | NT33-3BRF3-90-120-180 | NT33-3CRF3-90-120-180 | NT33-3DRF3-90-120-180 | NT33-3FRF3-90-120-180 | NT33-3HRF3A-90-120-180 |
| Height Range(mm) | 600-1250 | 600-1250 | 640-1290 | 640-1290 | 600-1250 | 600-1250 |
| Width Range(mm) | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 |
| Speed(mm/s) | 40 | 40 | 40 | 40 | 40 | 40 |
| Load Capacity(kg) | 150 | 150 | 150 | 150 | 150 | 150 |
| Electric Control | Advanced control system | | | | | |

**NT33-3AF3-90-120-180**




Rotatable frame

**Height Range**
600-1250mm

**Speed**
40mm/s


**Stroke**
650mm

**Width Range**
1010-1750mm

**Load Capacity**
150kg

**Voltage**
100V-240V



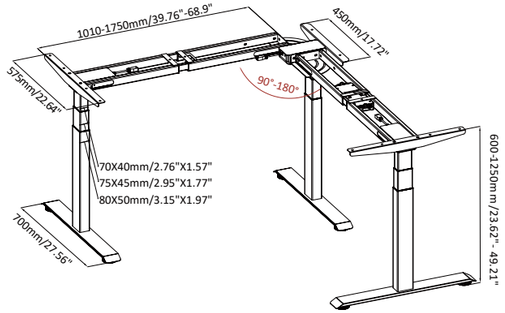

**Add-on welding block**




Connects standing desk frame columns; paired with side connectors, quickly converts single-person desk frames to face-to-face ones or other configurations, enhancing universality.

# 4-legs

four Motors/2-stage

Anti-collision ☑

Frame Color




| Shape |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| Size(mm) | 80x50 | 70x70 | 91x58 | φ70 | 85x55 | 90x60 |
| Standard Column | **NT33-4AF2** | **NT33-4BF2** | **NT33-4CF2** | **NT33-4DF2** | **NT33-4FF2** | **NT33-4HF2** |
| Reversed Column | **NT33-4ARF2** | **NT33-4BRF2** | **NT33-4CRF2** | **NT33-4DRF2** | **NT33-4FRF2** | **NT33-4HRF2** |
| Height Range(mm) | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 | 700-1200 |
| Width Range(mm) | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 |
| Speed(mm/s) | 30 | 30 | 30 | 30 | 30 | 30 |
| Load Capacity(kg) | 200 | 200 | 200 | 200 | 200 | 200 |
| Electric Control | **Advanced control system** | | | | | |

**NT33-4DF2**

**Height Range**
700-1200mm

**Speed**
30mm/s


**Stroke**
500mm

**Width Range**
1010-1750mm

**Load Capacity**
120kg/position

**Voltage**
100V-240V



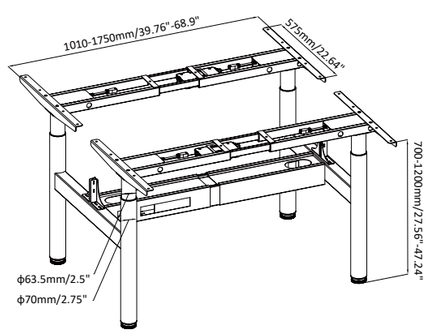





# 4-legs

four Motors/3-stage

Anti-collision ☑

Frame Color




| Shape |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| Size(mm) | 80x50 | 70x70 | 91x58 | φ70 | 85x55 | 90x60 |
| Standard Column | **NT33-4AF3** | **NT33-4BF3** | **NT33-4CF3** | **NT33-4DF3** | **NT33-4FF3** | **NT33-4HF3A** |
| Reversed Column | **NT33-4ARF3** | **NT33-4BRF3** | **NT33-4CRF3** | **NT33-4DRF3** | **NT33-4FRF3** | **NT33-4HRF3A** |
| Height Range(mm) | 600-1250 | 600-1250 | 640-1290 | 640-1290 | 600-1250 | 600-1250 |
| Width Range(mm) | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 | 1010-1750 |
| Speed(mm/s) | 40 | 40 | 40 | 40 | 40 | 40 |
| Load Capacity(kg) | 200 | 200 | 200 | 200 | 200 | 200 |
| Electric Control | **Advanced control system** | | | | | |

**NT33-4HF3A**



Add-on welding block

**Height Range**
600-1250mm

**Speed**
40mm/s


**Stroke**
650mm

**Width Range**
1030-1750mm

**Load Capacity**
120kg/position

**Voltage**
100V-240V



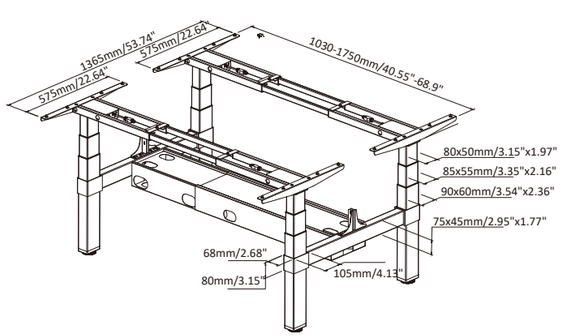


# Workstation

## Modular Design

Anti-collision ☑

Frame Color




### NT33-2HF3A



2-leg

**Height Range**
600-1250mm

**Width Range**
1010-1750mm


**Speed**
40mm/s

**Load Capacity**
120kg

**Stroke**
650mm

**Voltage**
100V-240V



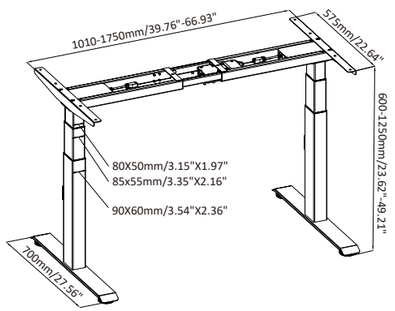


### NT33-3HF3A-90



Add one leg transformed from 2-leg to 3-leg

**Height Range**
600-1250mm

**Width Range**
1010-1750mm


**Speed**
40mm/s

**Load Capacity**
150kg

**Stroke**
650mm

**Voltage**
100V-240V



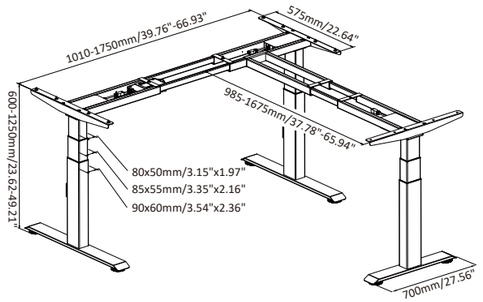



# Workstation

## Modular Design

Anti-collision ☑

Frame Color




### NT33-2HF3A



2-leg with groove

**Height Range**
600-1250mm

**Width Range**
1450-1750mm


**Speed**
40mm/s

**Load Capacity**
120kg

**Stroke**
650mm

**Voltage**
100V-240V



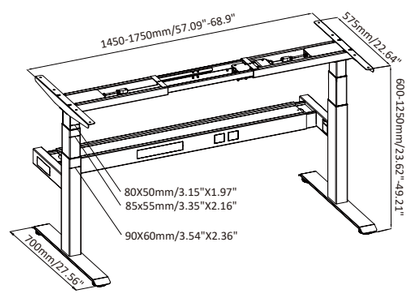


### NT33-4HF3A



Add two legs transformed from 2-leg with groove to 4-leg

**Height Range**
600-1250mm

**Width Range**
1450-1750mm


**Speed**
40mm/s

**Load Capacity**
120kg/position

**Stroke**
650mm

**Voltage**
100V-240V




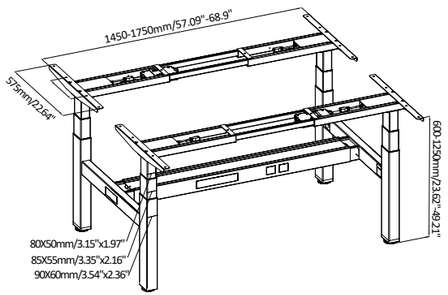

# Workstation

## Multi-station

Anti-collision ☑
Frame Color




**NT33-OB-6DF3**

**Height Range**
630-1280mm


**Speed**
35mm/s


**Stroke**
650mm

**Width Range**
1160-1750mm

**Load Capacity**
200kg

**Voltage**
100V-240V

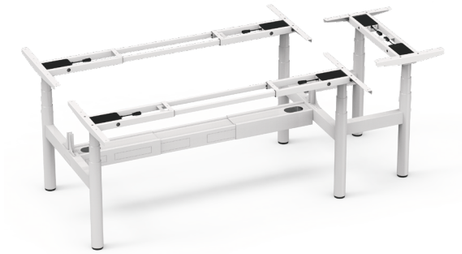

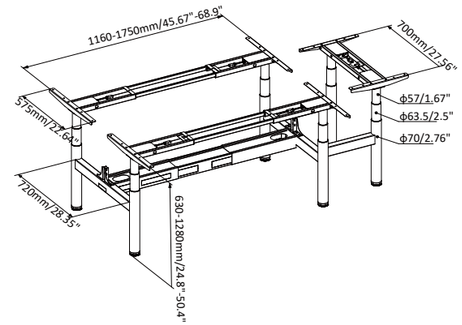


**NT33-OB-6BF3**

**Height Range**
600-1250mm


**Speed**
40mm/s


**Stroke**
650mm

**Width Range**
2140-3620mm

**Load Capacity**
300kg

**Voltage**
100V-240V

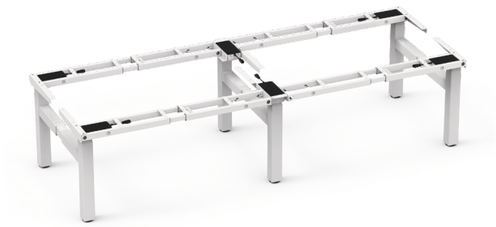

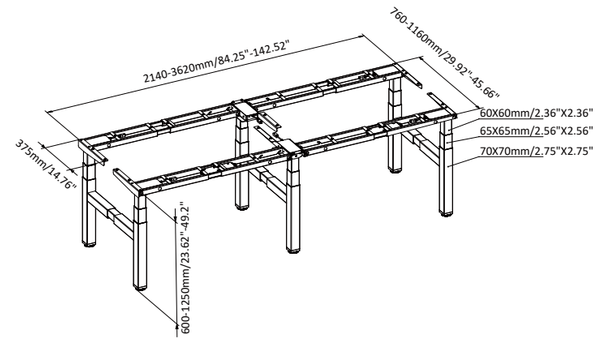


# Workstation

Multi-station

Anti-collision ☑


Frame Color

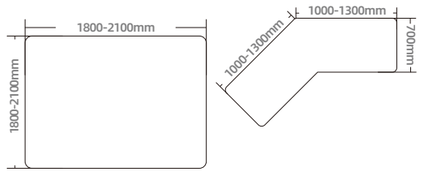


**NT33-OB-8DF3**

| Height Range | Speed | Stroke |
|---|---|---|
| 620-1270mm | 40mm/s | 650mm |
| **Desk Top** | **Load Capacity** | **Voltage** |
| 1800-2100mm | 120kg/position | 100V-240V |




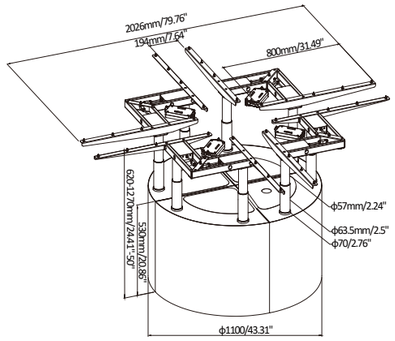


**NT33-OB-9DF3**

| Height Range | Speed | Stroke |
|---|---|---|
| 635-1285mm | 40mm/s | 650mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 755-1145mm | 150kg/position | 100V-240V |



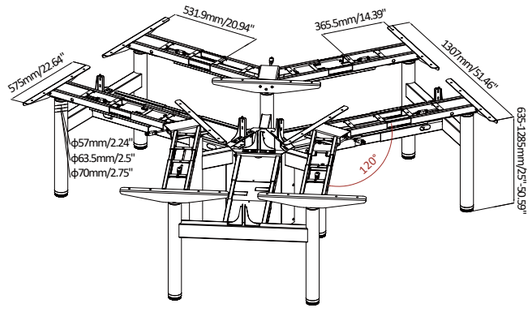



# Workstation

Multi-station

Anti-collision ☑


Frame Color




**NT33-OB-12BF3**

| Height Range | Speed | Stroke |
|---|---|---|
| 635-1285mm | 40mm/s | 650mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 1010-1750mm/<br>1372-2122mm | 150kg/position | 100V-240V |




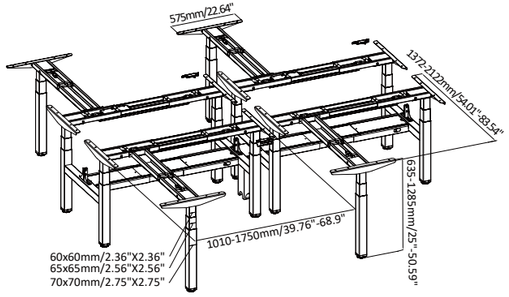


**NT33-OB-12BF3**

| Height Range | Speed | Stroke |
|---|---|---|
| 635-1285mm | 40mm/s | 650mm |
| **Width Range** | **Load Capacity** | **Voltage** |
| 1010-1750mm/<br>1372-2122mm | 150kg/position | 100V-240V |



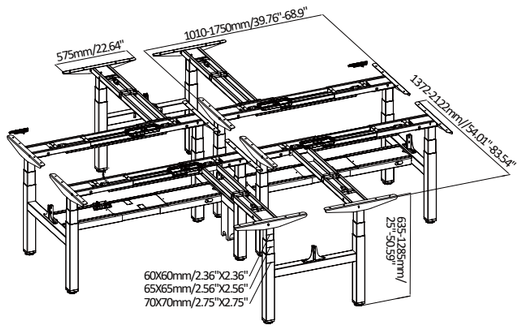

37''-65''

65''-100''

NATE

SONY

# TV Stand

## Single Motor

Anti-collision ☑

Frame Color

**NT33-1TV(B)**

**Height Range**
720-1580mm

**Speed**
30mm/s


**Stroke**
860mm

**Suitable TV Size**
37"-65"

**Load Capacity**
60kg

**Voltage**
100V-240V



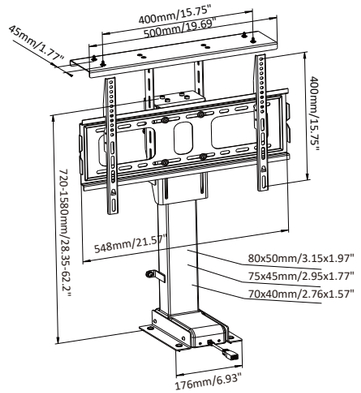


**NT33-2SYDTV(A)**

**Height Range**
870-1520mm

**Speed**
20mm/s


**Stroke**
650mm

**Suitable TV Size**
65"-100"

**Load Capacity**
70kg

**Voltage**
100V-240V



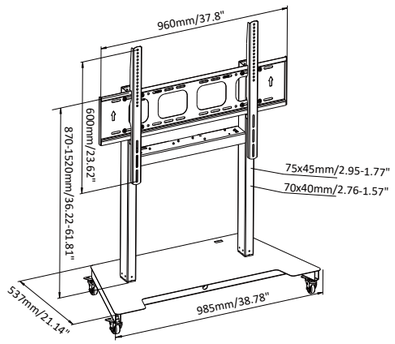


# TV Stand

## Dual Motors

Anti-collision ☑

Frame Color

**NT33-2YDTV(D)**

**Height Range**
920-1570mm

**Speed**
30mm/s


**Stroke**
650mm

**Suitable TV Size**
65"-100"

**Load Capacity**
100kg

**Voltage**
100V-240V



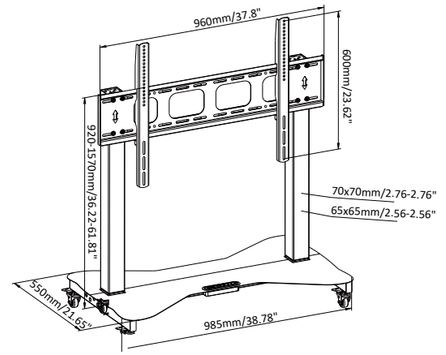


**NT33-2YDTV(E)**

**Height Range**
920-1570mm

**Speed**
30mm/s


**Stroke**
650mm

**Suitable TV Size**
Dual-Monitor/40"-65"

**Load Capacity**
100kg


**Voltage**
100V-240V



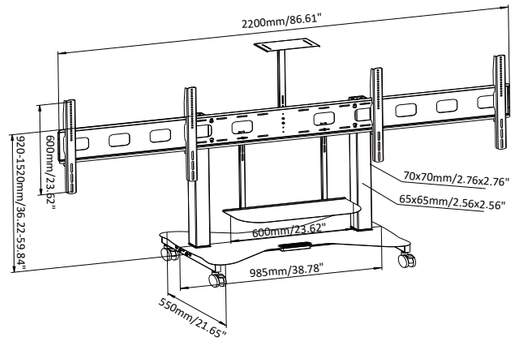

# Dual Motors

2-legs / 2-stage




| Shape |  |
|---|---|
| Size(mm) | 60x60 |
| Standard Column | NT33-2UF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

| Shape |  |
|---|---|
| Size(mm) | 60x60 |
| Reversed Column | NT33-2URF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

## NT33-2URF2



**D5** motor housing

**Height Range**
700-1200mm

**Speed**
30mm/s


**Stroke**
500mm

**Width Range**
960-1500mm

**Load Capacity**
100kg


**Voltage**
100V-240V



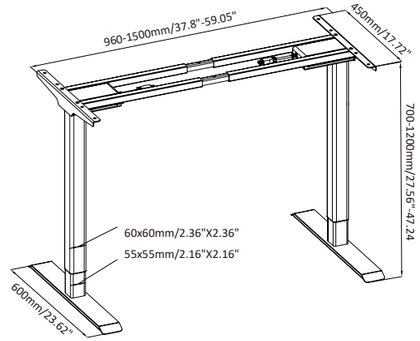


# Dual Motors

2-legs / 2-stage




| Shape |  |
|---|---|
| Size(mm) | 80x50 |
| Standard Column | NT33-2AF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

| Shape |  |
|---|---|
| Size(mm) | 80x50 |
| Reversed Column | NT33-2JRF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

## NT33-2JRF2



**D5** motor housing

**Height Range**
700-1200mm

**Speed**
30mm/s


**Stroke**
500mm

**Width Range**
960-1500mm

**Load Capacity**
100kg


**Voltage**
100V-240V



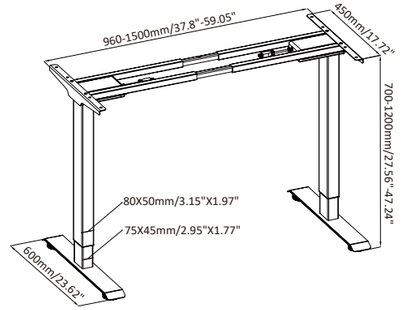

# Dual Motors

2-legs / 3-stage




| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Standard Column | NT33-2AF3 |
| Height Range(mm) | 600-1250 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 120 |
| Electric Control | Economic control system |

| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Reversed Column | NT33-2JRF3 |
| Height Range(mm) | 600-1250 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 120 |
| Electric Control | Economic control system |

**NT33-2JRF3**



**D5** motor housing

**Height Range**
600-1250mm

**Width Range**
960-1500mm


**Speed**
30mm/s

**Load Capacity**
120kg

**Stroke**
650mm

**Voltage**
100V-240V




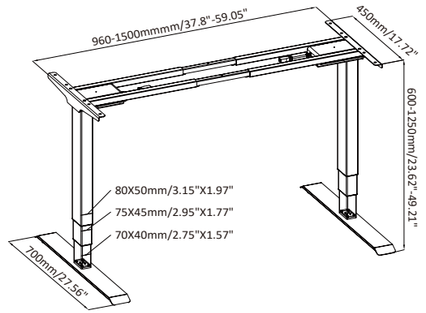




# Dual Motors

2-legs / 3-stage




| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Standard Column | NT33-2AF3 |
| Height Range(mm) | 600-1250 |
| Width Range(mm) | 1010-1750 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 120 |
| Electric Control | Economic control system |

| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Reversed Column | NT33-2JRF3 |
| Height Range(mm) | 600-1250 |
| Width Range(mm) | 1010-1750 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 120 |
| Electric Control | Economic control system |

**NT33-2AF3**

**Height Range**
600-1250mm

**Width Range**
1010-1750mm


**Speed**
30mm/s

**Load Capacity**
120kg

**Stroke**
650mm

**Voltage**
100V-240V



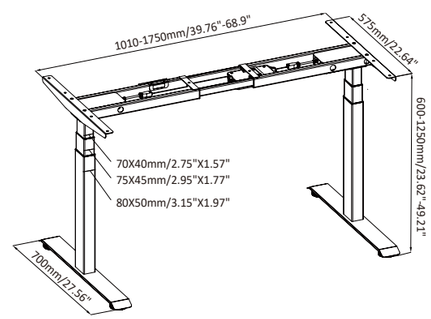


# Three Motors

3-legs / 2-stage

Anti-collision ☑

Frame Color




| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Standard Column | NT33-3AF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 1100-1800 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Reversed Column | NT33-3JRF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 1100-1800 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

## NT33-3JRF2

**Height Range**
700-1200mm

**Width Range**
1160-1800mm


**Speed**
30mm/s

**Load Capacity**
120kg

**Stroke**
500mm

**Voltage**
100V-240V



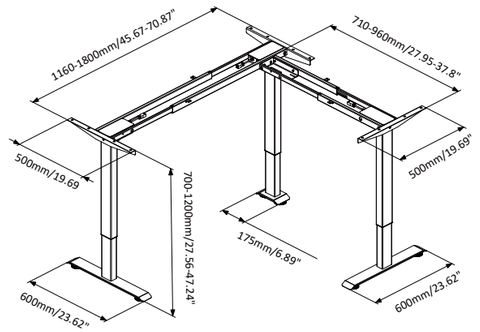


# Four Motors

4-legs / 2-stage

Anti-collision ☑

Frame Color




| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Standard Column | NT33-4AF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

| Shape | |
|---|---|
| Size(mm) | 80x50 |
| Reversed Column | NT33-4JRF2 |
| Height Range(mm) | 700-1200 |
| Width Range(mm) | 960-1500 |
| Speed(mm/s) | 30 |
| Load Capacity(kg) | 100 |
| Electric Control | Economic control system |

## NT33-4AF2



**D5** motor housing

**Height Range**
700-1200mm

**Width Range**
960-1500mm


**Speed**
30mm/s

**Load Capacity**
100kg/position

**Stroke**
500mm

**Voltage**
100V-240V



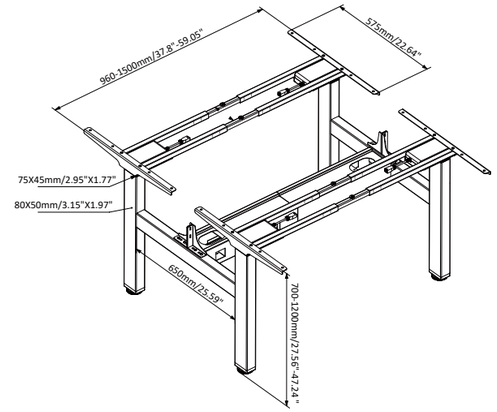

# Single Motor

2-legs / 2-stage




Anti-collision ☑

Frame Color

## NT33-2SDAF2

Round
Square

**Height Range**
700-1140mm

**Speed**
20mm/s


**Stroke**
440mm

**Width Range**
988-1400mm

**Load Capacity**
70kg

**Voltage**
100V-240V



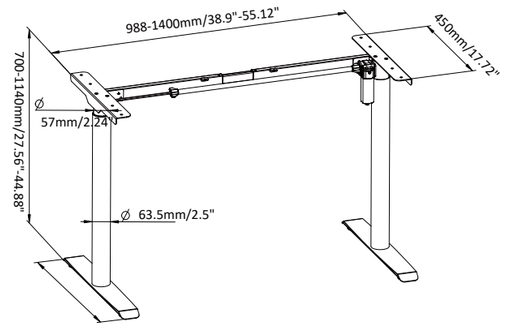


## NT33-2SCAF2

**Height Range**
700-1140mm

**Speed**
20mm/s


**Stroke**
440mm

**Width Range**
990-1400mm

**Load Capacity**
70kg

**Voltage**
100V-240V



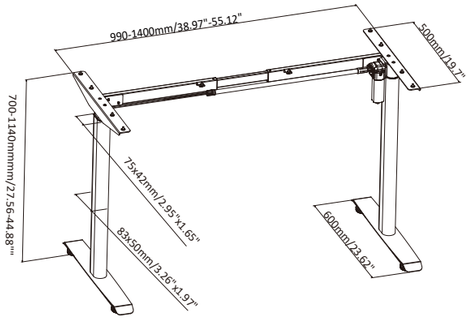






# Single Motor

3-legs / 4-legs / 2-stage




**NT33-3SABRH2**



Double rod structure is more robust to use

**Height Range**
690-1150mm

**Speed**
20mm/s


**Stroke**
460mm

**Width Range**
1045-1400mm/
1125mm

**Load Capacity**
80kg

**Voltage**
100V-240V



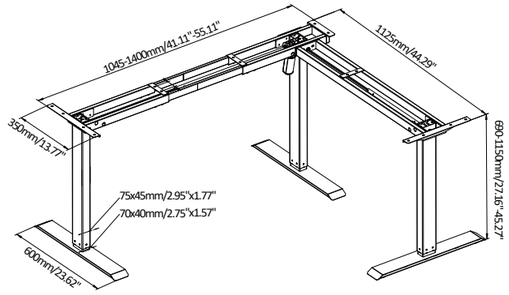


**NT33-4SAB2D**

**Height Range**
700-1140mm

**Speed**
20mm/s


**Stroke**
440mm

**Width Range**
1000-1400mm

**Load Capacity**
70kg/position


**Voltage**
100V-240V



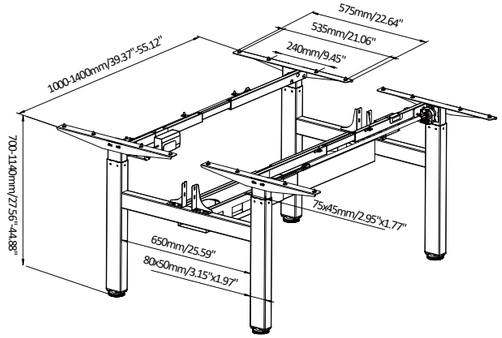

# Manual Table

Hand Crank / 2-stage




**NT33-2MR2**

**Height Range**
700-1150mm


**Speed**
10mm/circle

**Stroke**
450mm

**Width Range**
910mm

**Load Capacity**
80kg



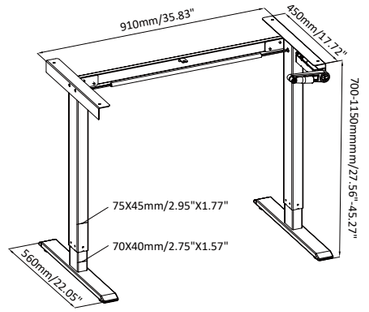


**NT33-2MABH2**

**Height Range**
710-1160mm


**Speed**
10mm/circle

**Stroke**
450mm

**Width Range**
980-1400mm

**Load Capacity**
80kg




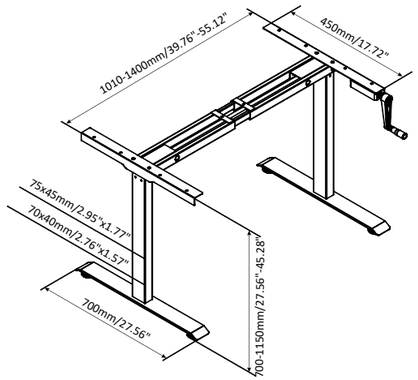




# Manual Table

Hand Crank / 2-stage




**NT33-3MH2(H)**

**Height Range**
710-1160mm


**Speed**
10mm/circle

**Stroke**
450mm

**Width Range**
1320-2160mm/
1145-1985mm

**Load Capacity**
80kg



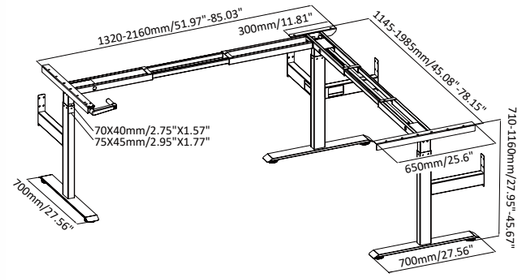


**NT33-3MH2(I)**

**Height Range**
710-1160mm


**Speed**
10mm/circle

**Stroke**
450mm

**Width Range**
1145-1985mm

**Load Capacity**
80kg



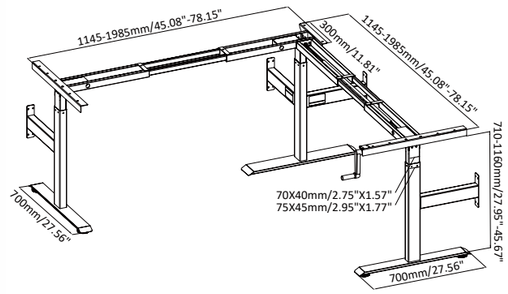


# Double-decker Desk

2-legs / 2-stage

Anti-collision ☑

Frame Color




**NT33-2SACRF2**

Single Motor

**Height Range**
700-1140mm

**Speed**
20mm/s


**Stroke**
440mm

**Top Size**
600x1200mm

**Load Capacity**
70kg

**Voltage**
100V-240V



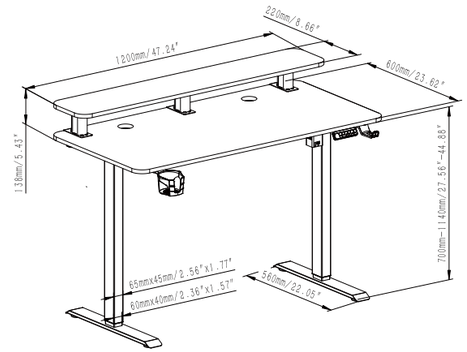


**NT33-2JRF2(A)**

Dual-motor

**Height Range**
700-1200mm

**Speed**
30mm/s


**Stroke**
500mm

**Top Size**
1400x700mm

**Load Capacity**
100kg


**Voltage**
100V-240V



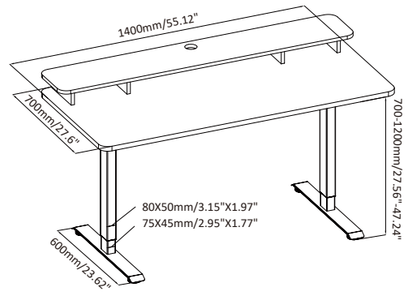

# Table For kids

2-legs/ 2-stage




**NT33-KD-2SAB2(C)**

**Height Range**
725-1150mm

**Speed**
20mm/s


**Stroke**
425mm

**Top Size**
1040x720mm

**Load Capacity**
50kg

**Voltage**
100V-240V



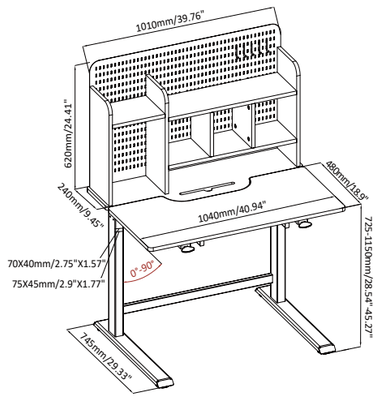


**NT33-KD-2SCF2(B)**

**Height Range**
600-950mm

**Speed**
20mm/s


**Stroke**
350mm

**Top Size**
1200x680mm

**Load Capacity**
70kg


**Voltage**
100V-240V



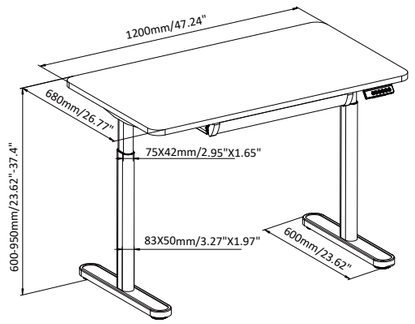


# Gaming Desk

2-legs / 2-stage




**NT33-GD-2SACRF2**

APP controls color conversion

LED Atmosphere Light

**Height Range**
720-1160mm

**Speed**
22mm/s


**Stroke**
440mm

**Top Size**
1200x600mm

**Load Capacity**
80kg

**Voltage**
100V-240V



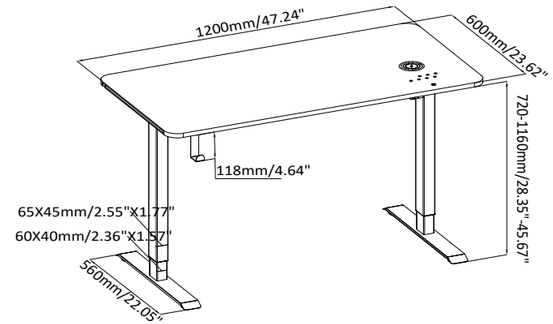


**NT33-GD-2SBAF2**

APP controls color conversion

LED Atmosphere Light

**Height Range**
710-1150mm

**Speed**
20mm/s


**Stroke**
440mm

**Top Size**
1400x700mm

**Load Capacity**
70kg

**Voltage**
100V-240V



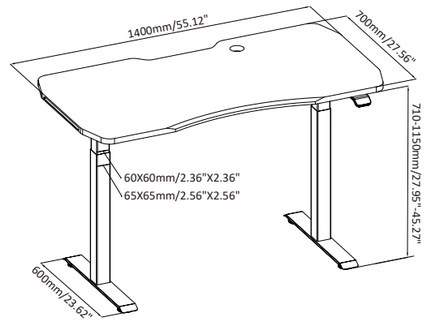


# Glass Table

2-legs / 2-stage

Anti-collision ☑

Frame Color





**NT33-E4-2JRF2(A)**

Type-A*1 (18W)

| Height Range | Speed | Stroke |
|---|---|---|
| 700-1200mm | 30mm/s | 500mm |
| **Top Size** | **Load Capacity** | **Voltage** |
| 1200x600mm | 80kg | 100V-240V |



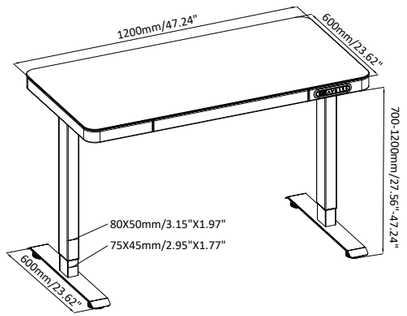



**NT33-E4Pro-2JRF2(A)**

Wireless Charging*1 (10W)
Type-C*1 (18W)
Type-A*2 (18W)

| Height Range | Speed | Stroke |
|---|---|---|
| 700-1200mm | 30mm/s | 500mm |
| **Top Size** | **Load Capacity** | **Voltage** |
| 1200x600mm | 80kg | 100V-240V |



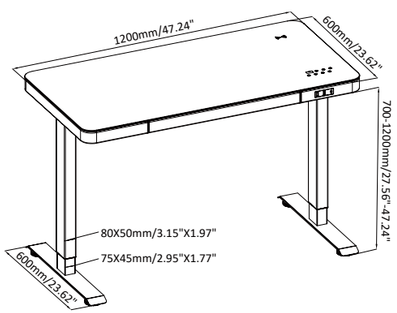



# Wooden Table

2-legs / 2-stage

Anti-collision ☑

Frame Color





**NT33-E4Pro-2SABRF2(B)**

Type-C*1 (18W)
Type-A*2 (18W)

| Height Range | Speed | Stroke |
|---|---|---|
| 715-1155mm | 20mm/s | 440mm |
| **Top Size** | **Load Capacity** | **Voltage** |
| 1200x600mm | 70kg | 100V-240V |



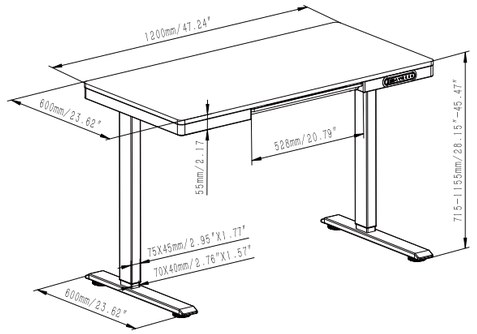



**NT33-E4(A)Pro-2JRF2**

Wireless Charging*1 (10W)
Type-C*1 (18W)
Type-A*2 (18W)

| Height Range | Speed | Stroke |
|---|---|---|
| 725-1225mm | 30mm/s | 500mm |
| **Top Size** | **Load Capacity** | **Voltage** |
| 1200x600mm | 100kg | 100V-240V |



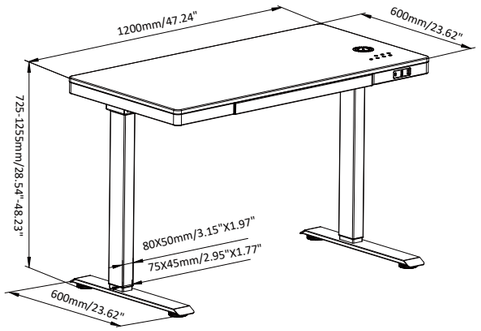


# Dining Table

4-legs /2-stage

Anti-collision ☑

Frame Color






## NT33-CZ-4SBERF2-C

Two motors

**Height Range**
700-1180mm

**Speed**
20mm/s


**Stroke**
480mm

**Width Range**
1500mm

**Load Capacity**
100kg

**Voltage**
100V-240V



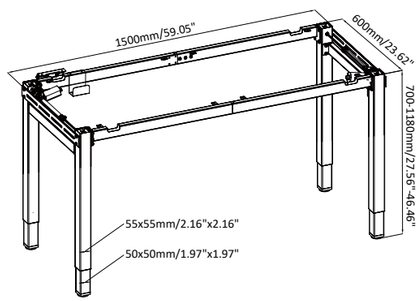


## NT33-CZ-4SBARF2

Two motors

**Height Range**
710-1150mm

**Speed**
20mm/s


**Stroke**
440mm

**Width Range**
1100-1700mm

**Load Capacity**
100kg

**Voltage**
100V-240V



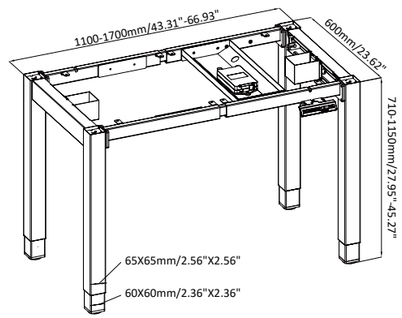


## NT33-CZ-4DBRF2-A

Four motors

**Height Range**
700-1150mm

**Speed**
30mm/s


**Stroke**
450mm

**Width Range**
1800mm

**Load Capacity**
100kg

**Voltage**
100V-240V



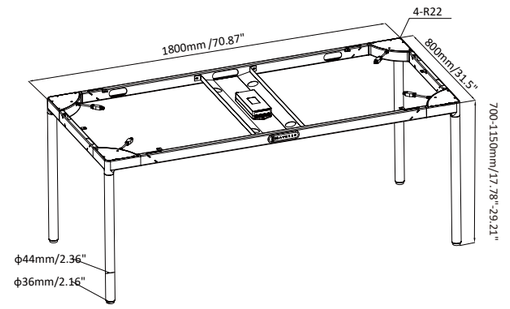





COMPLETE DESK SERIES

# Flip Table

Dual Motors / 3-stage

Anti-collision ☑

Frame Color




**NT33-T4-2AF3**

**Height Range**
600-1250mm

**Speed**
40mm/s


**Stroke**
650mm

**Top Size**
1200x770mm

**Load Capacity**
120kg

**Voltage**
100V-240V



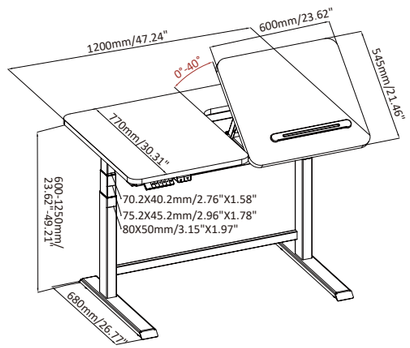


**NT33-T6-2AF3**

**Height Range**
600-1250mm

**Speed**
40mm/s


**Stroke**
650mm

**Top Size**
1200x600mm

**Load Capacity**
120kg

**Voltage**
100V-240V



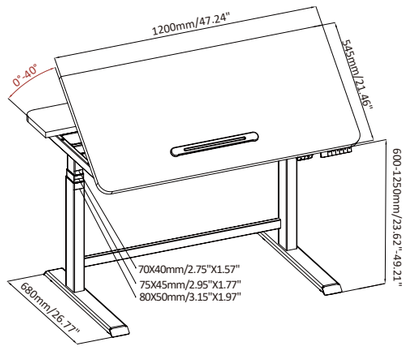


# Flip Table

Single Motor / Dual Motors

Anti-collision ☑

Frame Color




**NT33-ST1-2SACRHF2(A)**

**Height Range**
690-1150mm

**Speed**
20mm/s


**Stroke**
460mm

**Top Size**
1400x700mm

**Load Capacity**
70kg

**Voltage**
100V-240V



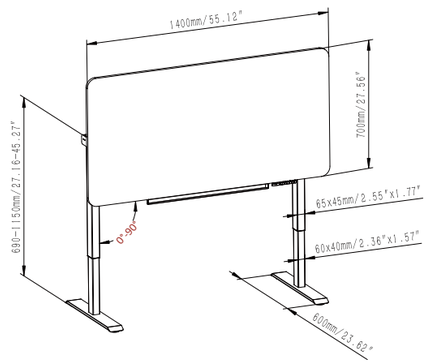


**NT33-T9-2AF3**

**Height Range**
600-1250mm

**Speed**
40mm/s


**Stroke**
650mm

**Top Size**
1400x700mm

**Load Capacity**
120kg

**Voltage**
100V-240V



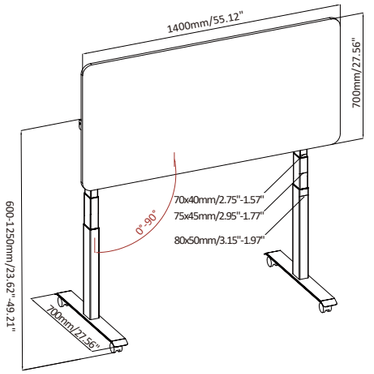


# LIFT COLUMNS

Core Drive Unit
Diverse Performance
Adapt to multiple scenarios
Excellence Design





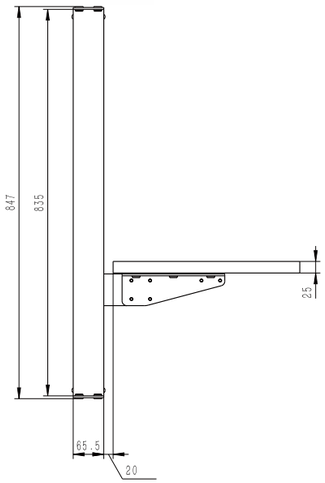


## WM-2I1


Standard

Load Capacity
**800N**

Stroke
**500mm**

Height
**290-790mm**

Speed
**25mm/s**




# Special Columns




### AD-VA2

Load Capacity
**2000N**

Stroke
**480mm**

Height
**640-1120mm**

Speed
**15mm/s**




Standard




### AD-VA3

Load Capacity
**2000N**

Stroke
**360mm**

Height
**400-760mm**

Speed
**10mm/s**




Standard




### RK-BHF3

Load Capacity
**600N**

Stroke
**630mm**

Height
**620-1250mm**

Speed
**30mm/s**




Standard




### TDIF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**600-1250mm**

Speed
**40mm/s**




Standard




### WM-1N1

Load Capacity
**500N**

Stroke
**500mm**

Height
**263-763mm**

Speed
**25mm/s**







### WM-2SA1

Load Capacity
**600N**

Stroke
**500mm**

Height
**263-763mm**

Speed
**20mm/s**







### HF3A PRO

Load Capacity
**800N**

Stroke
**650mm**

Height
**600-1250mm**

Speed
**80mm/s**




Standard




### BF4

Load Capacity
**800N**

Stroke
**680mm**

Height
**490-1170mm**

Speed
**50mm/s**




Standard

# 2-stage Columns




## AF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Standard



## BF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Standard




## CF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Standard



## DF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Standard




## ARF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Reverse



## BRF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Reverse




## CRF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Reverse



## DRF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Reverse



## UF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**25mm/s**



Standard




## HF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**50mm/s**



Standard




## NF2

Load Capacity
**1500N**

Stroke
**455mm**

Height
**695-1150mm**

Speed
**8mm/s**



Standard




## URF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**25mm/s**



Reverse




## HRF2

Load Capacity
**800N**

Stroke
**500mm**

Height
**665-1165mm**

Speed
**30mm/s**



Reverse

# 3-stage Columns




## AF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Standard



## BF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Standard




## CF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**600-1250mm**

Speed
**40mm/s**




Standard



## DF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**600-1250mm**

Speed
**40mm/s**




Standard




## ARF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Reverse



## BRF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Reverse




## CRF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**600-1250mm**

Speed
**40mm/s**




Reverse




## DRF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**600-1250mm**

Speed
**40mm/s**




Reverse




## FF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Standard




## HF3A

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Standard




## BHF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Standard




## IF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Standard




## FRF3

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Reverse




## HRF3A

Load Capacity
**800N**

Stroke
**650mm**

Height
**565-1215mm**

Speed
**40mm/s**




Reverse

# CONTROL BOX

Security protection mechanism
Powerful compatibility and extensibility

## ADVANCED CONTROL SYSTEM



### NT33-BK

- **2** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,5A
- Output: 32Vdc,each 110VA, total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



### NT33-BC

- **3** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,10.5A
- Output: 30Vdc,each 3.5A, total 10.5A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



### NT33-BO

- **4** legs supported
- Energy saving during non-use
- Input: 220-240VAC 50-60Hz,5A
- Output: 30Vdc,each 3A, total 12A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified

## ECONOMIC CONTROL SYSTEM



### NT33-BB

- **1** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,2.5A
- Output: 24Vdc,each 100VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



### NT33-BD

- **2** legs supported
- Energy saving during non-use
- Input: 28-32V
- Output: 18-26V
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



### NT33-BT

- **2** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,5A
- Output: 32Vdc,each 110VA,total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified

# HANDSETS

Choose The Best Handset
Options For Your Frame!

# ADVANCED CONTROL SYSTEM



## NT33-H1T ○●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Anti-Collision Function
- Logo On Start Up




## NT33-H1R ○●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Anti-Collision Function
- Logo On Start Up




## NT33-H1O ●

- OLED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge Optional
- LED colored lights
- Logo On Start Up



## NT33-H1S ○●

- Digital LED Screen
- 2 Memory Preset
- Anti-Collision Function
- Recessed Into Table Top




## NT33-H1H ●

- OLED Screen
- 3 Memory Preset
- Type C-quick Charge
- Anti-Collision Function
- Logo On Start Up



## NT33-HV ●

- OLED Screen
- UP DOWN Paddle
- 2 Memory Preset
- Type C-quick Charge Optional
- LED Light (Green/Orange/white)
- Time Reminder
- Multiple Languages Available ENG,DE,FR,ES,IT.
- Logo On Start Up



## NT33-H1W ○●

- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional
- Recessed Into Table Top
- USB Port optional




## NT33-HW1 ○●●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Time Reminder
- Multiple Languages Available ENG,DE,FR,ES,IT.
- Logo On Start Up




## NT33-H1I1 ●

- OLED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge
- Logo On Start Up




## NT33-H1D ●

- OLED Screen
- 2 Memory Preset
- Type C-quick Charge
- LED Light Background
- Logo On Start Up



## NT33-H1K ●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Logo On Start Up




## NT33-H1G ○●●

- Digital LED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge optional

# ADVANCED CONTROL SYSTEM



NT33-H1B ○●●

- Digital LED Screen
- Two Button-UP Down



NT33-H1F ●

- Digital LED Screen
- 4 Memory Preset
- Type C-quick Charge Optional



NT33-HU ○●●●

- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional

# ECONOMIC CONTROL SYSTEM



NT33-BHK ●

- Handset Integrated
- Digital LED Screen
- 4 Memory Preset
- Type C-quick Charge Optional




NT33-BHG ○●●

- Handset Integrated
- Digital LED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge optional



NT33-BHH ○●●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset



NT33-BHP ●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- USB Port optional



NT33-BHV ○●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional
- Recessed Into Table Top
- USB Port optional



NT33-BHU ○●●●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional

# SWITCH MODE POWER SUPPLY



SMPS-W-1.8A

- Input: 100-240V, 50/60Hz, 2.0A
- Output: 29.0V-1.8A 52.2W
- Global Power Standard Optional



SMPS-W-1.0A

- Input: 100-240V, 50/60Hz, 1.5A
- Output: 29.0V-1.0A 29.0W
- Global Power Standard Optional



European Plug



England Plug



USA Plug



Australia Plug



Chinese Plug



SMPS-P-1.8A

- Input: 100-240V, 50/60Hz, 1.6A
- Output: 29.0V-1.8A 52.2W



SMPS-P-2.0A

- Input: 100-240V, 50/60Hz, 1.5A
- Output: 29.0V-2.0A 58W



SMPS-P-3.0A

- Input: 100-240V, 50/60Hz, 2.0A
- Output: 29.0V-3.0A 87W

## Rechargeable Battery



NT33-Battery-001

- Rechargeable Li-ion Battery Pack
- Capacity: :25.9V/1800mAh/56.98Wh
- Max Discharged Current:5A
- For mobile applications
- Low battery alarm



NT33-Battery-002


- Rechargeable Li-ion Battery Pack
- Capacity: :25.9V/2200mAh/56.98Wh
- Max Discharged Current:5A
- For mobile applications
- Low battery alarm

# FEET

Strong Foundation Support
Multiple Size Ratio



## Bevel type



| | FA03B | FA22 | FB18 | FC04 | FR46 |
|---|---|---|---|---|---|
| DIMENSION | 700x75x20mm | 600x75x18mm | 700x80x18mm | 600x80x20mm | 560x65x17mm |
| PLATE THICKNESS | 2.5mm/2.5mm | 2.5mm/2.0mm | 2.5mm/3.0mm | 2.5mm/2.5mm | 2.0mm/2.0mm |
| FIT TUBE | Rectangle(80*50) | Rectangle(80*50) | Square | Oval,Round | Rectangle(80*50) |
| FEATURE | Bevel | Bevel | Bevel | Bevel | Bevel |

## Thicken type



| | FA85 |
|---|---|
| DIMENSION | 700x75x22mm |
| PLATE THICKNESS | 2.5mm/2.0mm |
| FIT TUBE | Rectangle(85*55,90*60) |
| FEATURE | Thick/ Bevel |

## Round type



| | FC06 | FD04 |
|---|---|---|
| DIMENSION | 700x85x20mm | 680x85x22mm |
| PLATE THICKNESS | 3.0mm/3.0mm | 4.0mm/4.0mm |
| FIT TUBE | Oval | Round |
| FEATURE | Round head | Round head |

## Economic type



| | FR30 | FA55 | FA67 |
|---|---|---|---|
| DIMENSION | 560x60x20mm | 560x60x20mm | 600x70x20mm |
| PLATE THICKNESS | 2.0mm | 2.0mm | 2.0mm |
| FIT TUBE | Rectangle(80*50) | Rectangle(80*50) | Rectangle(80*50) |
| FEATURE | Low Cost | Low Cost | Low Cost |

| FIT TUBE | | | | |
|---|---|---|---|---|
| |  |  |  |  |
| | LJK-A | LJK-H/F | LJK-B | LJK-D |
| | Rectangle (80*50) | Rectangle (85*55,90*60) | Square (70*70) | Round (70*70) |

| | | | | |
|---|---|---|---|---|
| DIMENSION |  |  |  |  |
| SCREW THREAD | JLD | JLE | HLA | HLD |
| | φ50 M8*14 | φ65 M8*14 | φ40 M8*15 | φ50 M8*15 |

# ACCESSORIES

Line Management Scheme



# ACCESSORIES

## LIFTING TABLE ACCESSORIES

### Cable Tray



XC51

Dimension : 850 x 140 x 26 mm
Material : Steel
Colour ● ● ○



XC38

Dimension : 920x172.5x20mm
Material : Steel
Colour ● ● ○



XC131

Dimension : 480x68x30mm
Material : Steel
Colour ● ● ○



XC94

Dimension : 1150x139.6x98mm
Material : Steel
Colour ● ● ○



XC112

Dimension : 400x111x100.5 mm
Material : Steel
Colour ● ● ○



XC113

Dimension : 1200x153x85mm
Material : Steel
Colour ● ● ○

### Tank Chain



FOOT TANK CHAIN

Dimension :145x145x1320mm
Material :Plastic+Steel
Colour ● ● ○ ●



BOX TANK CHAIN

Dimension : 86x60x1320mm
Material : Plastic+Steel
Colour ● ● ○ ●



MAGNETIC TANK CHAIN

Dimension : 34.5x34.5x1320mm
Material : Plastic+Steel
Colour ● ● ○ ●



MAGNETIC BOX TANK CHAIN

Dimension : 350x59.6x1320mm
Material : Plastic+Steel
Colour ● ● ○ ●

### Drawer combination



DRAWER COMBINATION A

Packing size : 545x295x45mm
Material : Plastic
Colour ● ● ○



DRAWER COMBINATION E

Packing size : 470x360x120mm
Material : Steel
Colour ● ● ○

### CPU holder



HOST BRACKET A1

Packing size : 430x250x200mm
Material : Steel
Colour ● ● ○



HOST BRACKET B

Packing size : 455X220X135mm
Material : Plastic
Colour ● ● ○

### Screen



SIDE INSERT SCREEN

Dimension : 790x395x(12+12)mm
Material : 100%PET
Colour 40+





CURVED FOLDABLE SCREEN

Dimension : （350+1200+350）x600Hx12mm
（350+1400+350）x600Hx12mm
Material : 100%PET
Colour 40+

TWO-SEATER SCREEN

Packing size : 1200x700x(12+12)mm
1400x700x(12+12)mm
1600x700x(12+12)mm
Material : 100%PET+Fabric
Colour:Series 006: 25 Color Options + Series 9009

# TABLE TOP

## Density Board


WHITE SCRUB


WHITE OAK


VINTAGE


LIGHT WOOD GRAIN


WHITE MOONLIGHT MATT


CAIRO WALNUT


SCHATT WALNUT


DEEP WALNUT


BLACK SCRUB


BLACK CARBON FIBER


BLACK WOOD GRAIN

## Shaving Board


WHITE


KNOT OAK


MAPLE


AMBER YELLOW


WHITE OAK


BLACK CARBON FIBER


WALNUT CANYON


GRAY LINEN


APPLE YELLOW


RUST YELLOW


ZEBRAWOOD


BLACK SCRUB

## Size Selection

